

HGK可调式滚轮架
HGK Adjustable Turning-roll

可调式滚轮架有丝杆可调式和机调式两种。通过调整滚轮的中心距，适用不同直径筒体。
Zoom type turning rolls is divided into screw mandrel type and machine adjustable type. Through tuning the centre-to -centre of the wheels, it can be used for cylinders of various diameters.



主要功能及特点 Main functions and features

规格型号 Type	最大承载重量 (Kg) Max load weight(kg)	适应工作范围 (mm) Size limit of suitable product (mm)	滚轮直径和宽度(mm) Diameter and width of the wheel(mm)		滚轮线速度 (m/h) Wheel linear velocity(m/h)	电机功率 (Kw) Power of motor(kw)	间距可调 方式 Adjustable mode for space	调速方式 Way of setting
			橡胶轮 Rubberrollers	金属轮 Metal rollers				
HGk-2	2000	Φ200-1200	Φ200×100	2×Φ190×16	6-60	2×0.18	手动丝杆可 调、螺钉分 档可调 Manual screw arbor control or conventional power grading	变频无级 调速或 直流无级 调速
HGK-5	5000	Φ250-2300	Φ250×100	2×Φ240×20	6-60	2×0.37		
HGK-10	10000	Φ300-2800	Φ300×120	2×Φ290×25	6-60	2×0.55		
HGK-20	20000	Φ500-3500	Φ350×120	2×Φ340×35	6-60	2×1.1		
HGK-40	40000	Φ600-4200	Φ400×120	2×Φ390×45	6-60	2×1.5		
HGK-60	60000	Φ750-4800	Φ450×120	2×Φ440×60	6-60	2×2.2	螺钉分 档可调 Conventional power grading control	Frequency- conversion stepless speed control or DC stepless speed control
HGK-80	80000	Φ850-5000	Φ500×120	2×Φ490×70	6-60	2×3		
HGK-100	100000	Φ1000-5500	Φ500×120	2×Φ490×80	6-60	2×3		
HGK-150	150000	Φ1100-6000	/	Φ620×220	6-60	2×4		
HGK-250	250000	Φ1100-7500	/	Φ660×260	6-60	2×5.5		
HGK-400	400000	Φ1100-7500	/	Φ750×320	6-60	2×7.5		
HGK-500	500000	Φ1100-7500	/	Φ750×400	6-60	2×11		

备注：HGK-2 ~ HGK-100滚轮为钢胶结合滚轮，HGK-100 ~ HGK-500的滚轮为全钢或进口橡胶
Note: HGK-2~HGK-100 roller wheel is made of steel and rubber, HGK-100~HGK-500 roller wheel is made of full steel or imported rubber


特种滚轮架
Special turning-rolls




250T滚轮架
250T Turning-rolls




行走式滚轮架
The traveling trolley turning-rolls

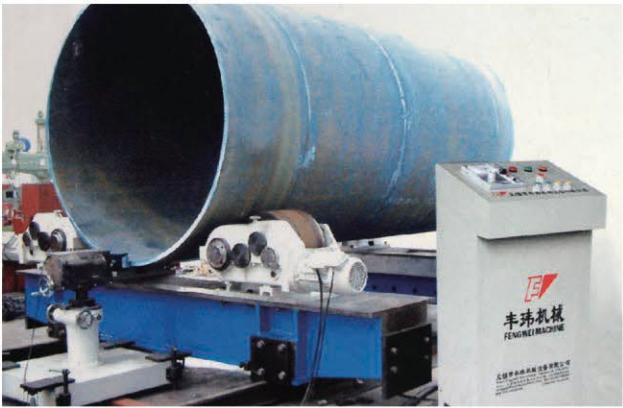

防窜动滚轮架
Anti-scurrying turning-rolls

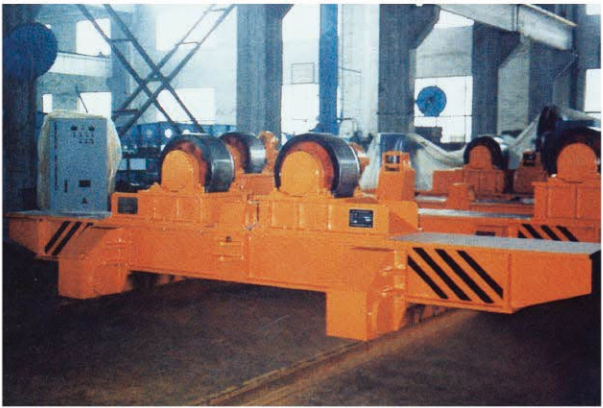

160T行走式滚轮架
160T The traveling trolley turning-rolls

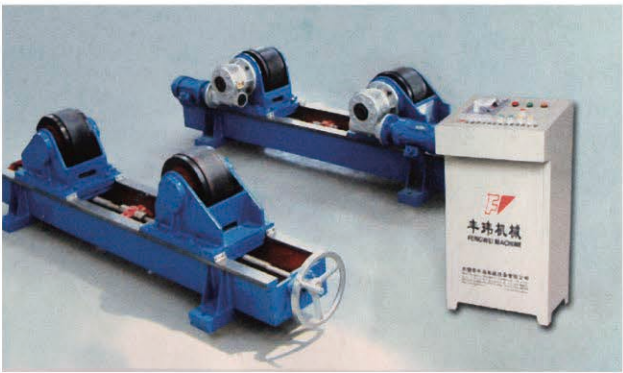

丝杠可调式滚轮架
Conventional power control turning-rolls



300T滚轮架
300T Turning-rolls